

Key Benefits:


- Assures optimal placement during preconstruction

PB-R03

PRECONSTRUCTION BRACKET FOR WAP-C3G AND WAP-C3N

The WAP-C3G and WAP-C3N was designed so it can be installed without the Preconstruction Bracket. However, we highly recommend using the bracket for preconstruction scenarios. Typically after framing, there are many different trades competing for ceiling locations to run water pipes, ceiling can lights and fire sprinklers.

The Preconstruction bracket will enable the installer to reserve the optimal locations for Wireless Access Points. The Bracket will serve as a clear beacon to the other trades that electronic devices will be installed at these locations.

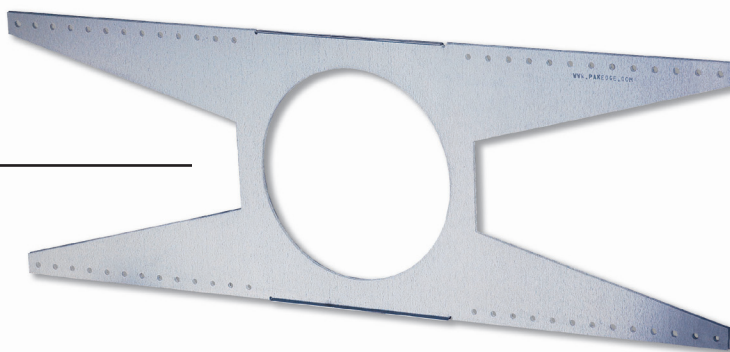

Specifications

MATERIAL

16 Gauge Galvanized Sheet
Metal Construction

DIMENSION

27.00 (L) x 9.25" (W)
with 7.125" Diameter
opening for WAP

WEIGHT

1 lbs and 12 ounces

[HTTP://
WWW.
PAKEDGE
.COM](http://www.pakedge.com)

1163 Triton Drive
Foster City, CA 94404
Main: 877.274.6100
Fax: 650.685.5520
sales@pakedge.com

pakedge device & software inc.